

UL Fire Rated Rim Mount Strike


Introducing the 2495FR



2495FR



APPLICATION

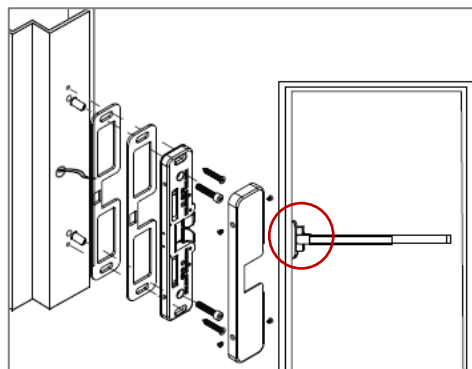

The 2495FR is a surface mounted strike designed with strength and durability for rim exit devices with a 1/2" Pullman latch. It can also accommodate a 3/4" latch throw with the included spacers. The 2495FR is non handed, dual voltage (12/24 VDC), and field reversible from fail-secure to fail-safe. This Grade I strike is UL listed for both fire & burglary.

Features:

- No frame cutting required. Surface mounted. Horizontal adjustment
- Dual voltage 12/24 VDC field selectable
- Non handed: Fully reversible
- Field reversible: Fail-safe or fail-secure
- Static strength 1500 lbs (680 kg)
- Dynamic strength 70 ft-lbs
- Endurance 250,000 cycles UL tested. Factory tested 1,000,000 cycles
- UL listed for burglary-resistance (file CVXY.BP3741) & 1.5 hour fire (file ALVY.BP7227)
- 2 Custom fit 1/8" spacers included in every 2495FR package
- 540mA/12VDC, 330mA/24VDC
- US32D Stainless Steel Finish

Complete the system with



9350 Exit Button



9860 Standalone Proximity Reader



9964G Time Delay 0-30Sec