

1

2







3

4

5

6

Total length (optional)

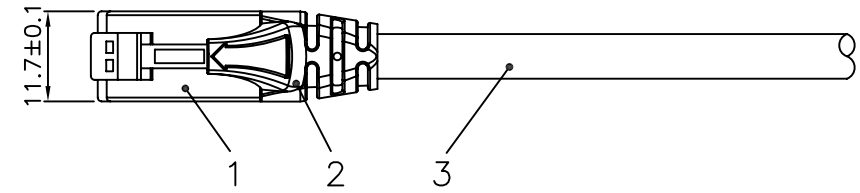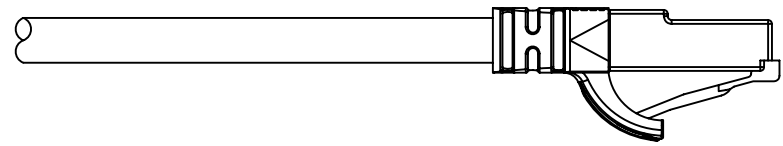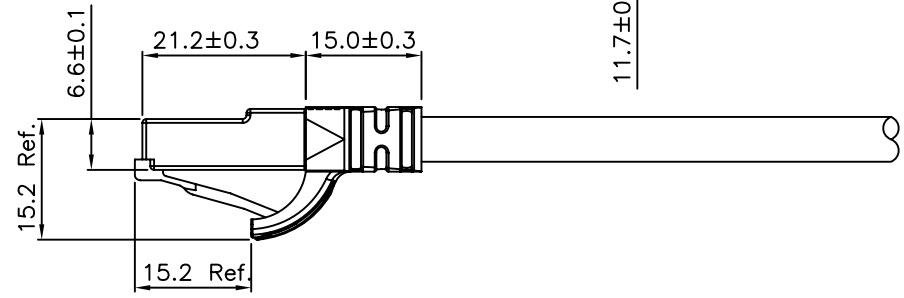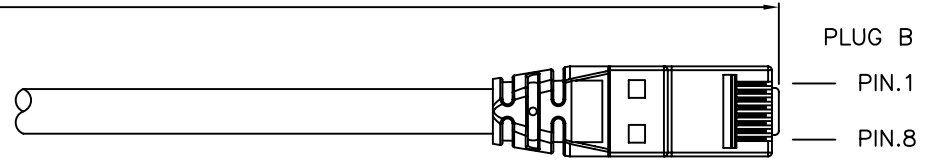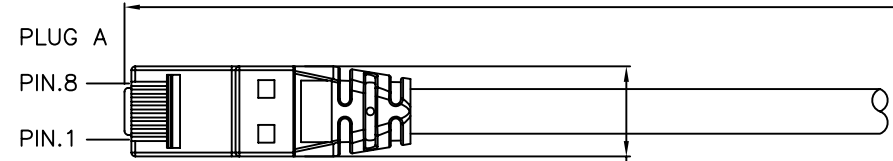

Specification :


- Material :
- RJ45 Plug :
 - Housing : Polycarbonate, UL 94V-2, Transparent color.
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact finished : Min. 50 micro-inch Gold plated.
 - Molding: PVC.
 - Cable :
 - Jacket : PVC.
 - Conductor : 24 AWG stranded copper.
 - Isolation : PE.
 - Isolation Cross Bar for 4 pairs : PE.
 - Cable structure : U/UTP, 4 twisted pair with Cross Bar.

Remark : ACABXX036X XXX X

(1) (2) (3) (4)

- XX : Jacket Color
 01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
 05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
 08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
 11=Pink(RAL4003)
- X : Wiring
 1=T568A, 2=T568B, 3=T568A & T568B combination
- XXX : Length
- Length Unit : 1=cm, 2=meter, 3=feet.
 (3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
 0033=3feet, 0103=10feet

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	15.FEB.2014	SP	
	CHECK	15.FEB.2014	YT	
	APPROVAL	15.FEB.2014	YTY	
		DATE	NAME	ITEM NO.: NP140214-001
	SCALE	1/1 (A4)	UNIT	mm
				DES.: C6 U/UTP short molding Patch Cord
	DRAWING NO.			
	DRAWING CLASSIFICATION		S	SHEET 1 OF 1



1

2

0

3

4

10cm

5

6